


EM02DS-FIRE

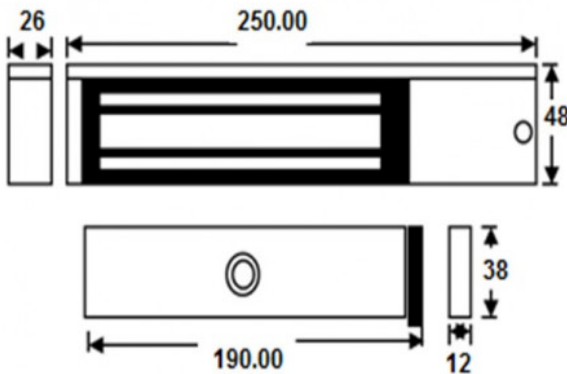

SSP FIRE RATED SINGLE MONITORED SLIM MAGLOCK W/DOOR STATUS

SSP Fire Rated Single Monitored Slim Maglock w/Door Status

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design; Surface Mount
- Dual voltage 12Vdc or 24Vdc (selectable)
- Silver anodised aluminium finish
- Lock monitoring & door status monitoring

TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 2kg approx.
- Red/Green LED indicator
- Relay: COM/NO/NC (1A@24Vdc)
- Reed switch door contact

RELATED PRODUCTS

 <p>EM01DS-ARM/SAFETY</p>	 <p>EM300ABP</p>	 <p>EM300ZL-FIRE</p>	 <p>NT200</p>
---	--	---	---