

EM20DS-FIRE




SSP FIRE RATED STANDARD MONITORED MAGLOCKS WITH DOOR STATUS

SSP Fire Rated Standard Monitored Maglocks With Door Status

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring
- Door status monitoring

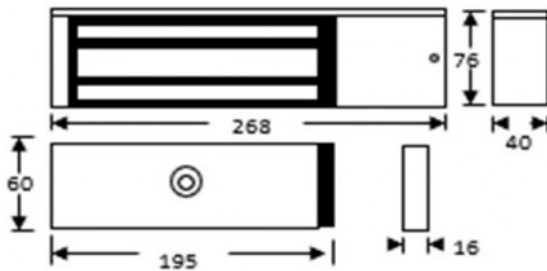

TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4.8kg approx.
- Red/Green LED indicator
- Relay: COM/NO/NC (1A@24Vdc)
- Reed switch door contact

RELATED PRODUCTS

 <p>EM-AH10-1</p>	 <p>EM500ABP</p>	 <p>EM500L-FIRE</p>	 <p>PSU3A-12</p>
---	--	--	--