

sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

EB1224

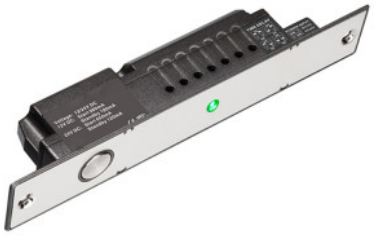

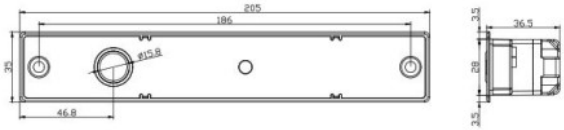

SSP SOLENOID BOLT FAIL SAFE 35MM WIDE 12/24VDC

FEATURES

- Fail-safe operation (power to lock)
- Input voltage: 12-24Vdc
- Variable re-lock delay 0s, 3s, 6s, 9s
- Door-status monitoring
- Mortice installation
- Low holding current
- 'Request to exit' input
- LED lock status indicator
- Suitable for single or double-action doors
- Size: 35mm(W) x 205mm(L) x 38mm(D)
- Mirror finish faceplate

TECHNICAL INFORMATION

- Fail-safe operation (power to lock)
- Input voltage: 12-24Vdc
- Activating current 980mA @ 12Vdc
- Holding current 180mA @ 12Vdc
- Re-lock delay settings: 0s, 3s, 6s, 9s
- Bolt diameter 16mm
- Bolt throw 17.5mm
- Size: 35mm(W) x 205mm(L) x 38mm(D)
- Operating temp: -10°C to 45°C
- Humidity: 0~95% non-condensating
- Door-status contacts: COM, NO
- 'Request to exit' input
- LED lock status indicator (Red = locked. Green = unlocked)