SPECIALIZED SECURITY PRODUCTS

sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

EB300




SSP 12VDC SURFACE FAIL SAFE SOLENOID BOLT

SSP 12VDC Surface Fail Safe Solenoid Bolt

FEATURES

- Suitable for horizontal or vertical installation
- Fail safe (power to lock)
- Door position monitoring
- Variable re-lock delay
- Low holding current
- Anti-tamper design
- Suitable for single or double-action doors

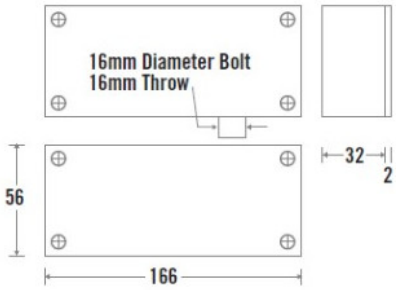

TECHNICAL INFORMATION

- Input voltage: 12Vdc ±10%
- Activating current 900mA
- Holding current 300mA
- Bolt diameter 16mm
- Bolt throw 16mm
- Monitoring contacts: SPDT (COM, NO, NC) rated 250mA @ 30Vdc
- Operating temp: -10°C to 45°C
- Humidity: 0~95% non-condensing

RELATED PRODUCTS



EB165



ER350



KGG300SG



NT200-NF