


## EM00R

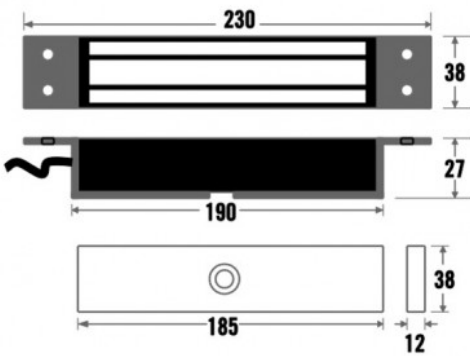

### MONITORED MORTICE MAGLOCK 12/24VDC

Monitored mortice fix maglock with 275kg holding force. Used to achieve a flush finish or with slim architectural housings.

#### FEATURES

- MOV provides spike and surge protection
- Fail safe operation (power to lock)
- Anti residual magnetism protection
- Armature plate and fixings included
- Slim design
- Suitable for slim architectural housings
- Mortice fix gives flush finish
- Lock monitoring
- Dual voltage 12Vdc or 24Vdc (selectable)

#### TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non condensating
- Weight: 2kg approx.
- Relay: COM/NO/NC (1A@24Vdc)

## RELATED PRODUCTS

 <p><b>10000STR</b></p>	 <p><b>EM-AH2/2DS</b></p>	 <p><b>KGG300SG-LSRC</b></p>	 <p><b>SPB004S</b></p>
--	--	--	---