

EM02




**SLIM MONITORED MAGLOCK
12/24VDC**

Slim single lock-monitored magnetic lock. Its compact design makes it ideal for most indoor applications where 275kg holding force is sufficient. Monitoring provides LED lock status indication and relay contacts for signalling.

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring

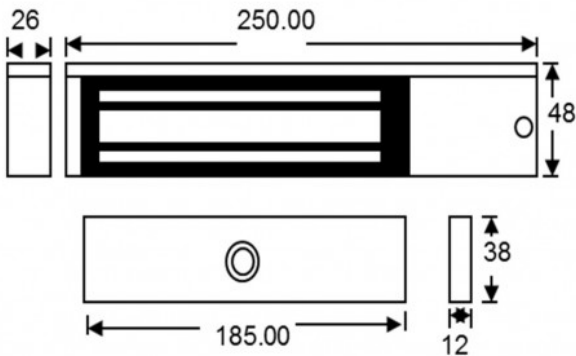

TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 2kg approx.
- Red/Green LED indicator
- Relay: COM/NO/NC (1A@24Vdc)

RELATED PRODUCTS

 <p>EM300ABP</p>	 <p>EM300ZLG</p>	 <p>NT200-S</p>	 <p>EM02-ECO</p>
------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------