
sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

EM02DS



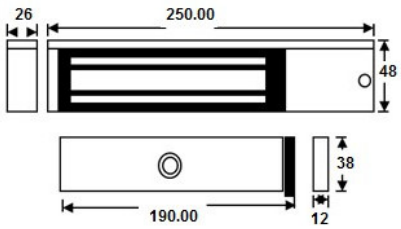

SSP SLIM MONITORED MAGLOCK WITH DOOR STATUS MONITORING

SSP Slim Monitored Maglock With Door Status Monitoring

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design; Surface mount
- Dual voltage 12Vdc or 24Vdc (selectable)
- Silver anodised aluminium finish
- Lock monitoring
- Door status monitoring

TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 2kg approx.
- Red/Green LED indicator
- Relay: COM/NO/NC (1A@24Vdc)
- Reed switch door contact

RELATED PRODUCTS



EM05



EM20



EM300AZLG



EM320M