


## EM04DS-ARM/SAFETY

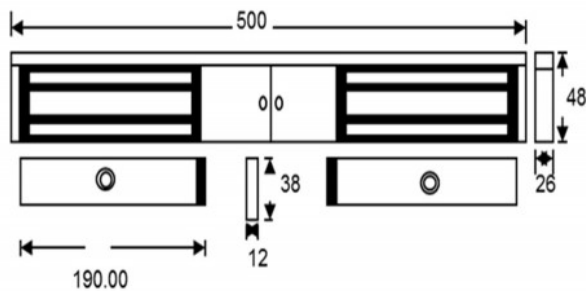

## SLIM UNMONITORED DOUBLE MAGLOCK DOOR STATUS AND ARM STRAP

The locks compact design makes it ideal for most indoor applications where 275kg holding force is sufficient. This model includes door status monitoring contacts to monitor each door position (open or closed). With arm strap pre-fitted.

### FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodized aluminium finish
- Door status monitoring

### TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4kg approx.
- Reed switch door contact (one per side)

## RELATED PRODUCTS



**DU04-CP22**



**EM300ZL**



**EM60DS**



**PSU3A-12**