

EM05




**SLIM MONITORED DOUBLE MAGLOCK
12/24VDC**

Slim monitored double magnetic lock for double doors. Compact design making it ideal for most indoor applications where 275kg holding force is sufficient. Monitoring provides LED lock status indication and relay contacts for signalling.

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring

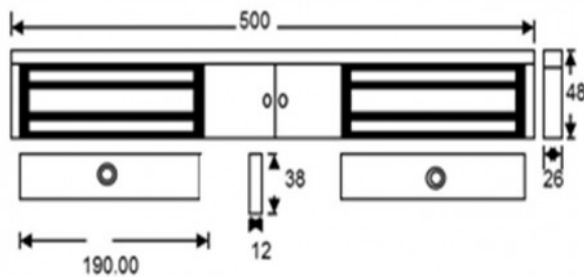

TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4kg approx.
- Red/green LED indicator (one per side)
- Relay : COM/NO/NC (1A @ 24Vdc) (one per side)

RELATED PRODUCTS



EM02



EM300AZLG-DC



EM320M