

## EM05




### SLIM MONITORED DOUBLE MAGLOCK 12/24VDC

Slim monitored double magnetic lock for double doors. Compact design making it ideal for most indoor applications where 275kg holding force is sufficient. Monitoring provides LED lock status indication and relay contacts for signalling.

#### FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring

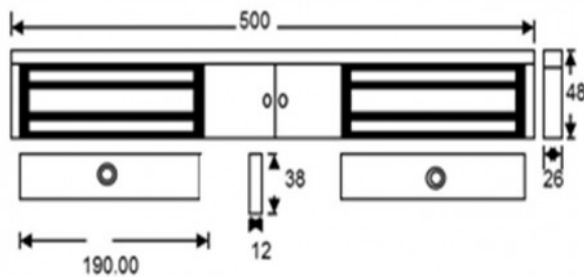

#### TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4kg approx.
- Red/green LED indicator (one per side)
- Relay : COM/NO/NC (1A @ 24Vdc) (one per side)

## RELATED PRODUCTS

