
SPECIALIZED SECURITY PRODUCTS

sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

EM40DS-ARM/SAFETY



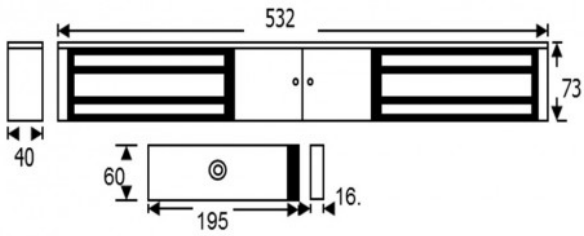

DOUBLE STANDARD MAGLOCK SURFACE MON WITH DS AND ARM STRAP

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring
- Door status monitoring

TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 9.6kg approx.
- Relay: COM/NO/NC (1A@ 24Vdc) (one per side)
- Reed switch door contact (one per side)

RELATED PRODUCTS



EM20-FIRE



EM500ABP



EM500ZL-FIRE



PSU3A-12