
SPECIALIZED SECURITY PRODUCTS

sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

EM750R



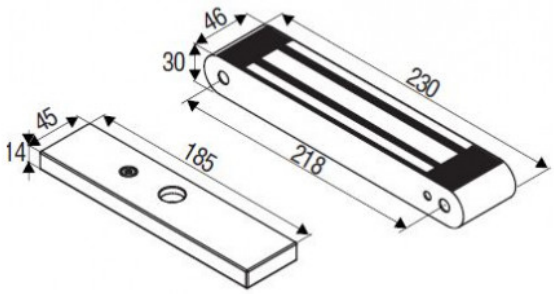

ARCHITECTURAL MIDI MONITORED MAGLOCK WITH RADIUS ENDS 12VDC

FEATURES

- Holding force up to 800lbs (363kg)
- Lock monitoring
- Top plate, armature and fixings included
- Dual voltage 12 or 24VDC selectable
- MOV provides spike & surge protection
- Stainless steel case
- Anti-residual magnetism function
- Fail-safe (power to lock)

TECHNICAL INFORMATION

- Voltage Tolerance: +/-15%
- Current Draw: 340mA@12Vdc
- Magnetic bond sensor monitor output (00R) SPDT RATED 0.5A@20VDC
- Operating Temperature: -10~55C (14~131F)
- Holding Force Up to 800lbs (363kg)
- Dimensions:
  Magnet (L)230. (W)46. (D)30mm
  Armature: (L)185. (W)45. (D)14.mm
- Epoxy Potting Compound: E87252 (S), UL94V-0
- Weight (approx) : 3.0kg


RELATED PRODUCTS



DG35



EM06S



EXT-R12/24



WWG7-220G(M)