

GS200



UNMONITORED MICRO SHEARLOCK


This unmonitored micro shearlock is recommended for use on doors where a concealed lock is required. Ideal for double action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

FEATURES

- Mortice fitting
- Horizontal or vertical installation
- Surface housing available (part GS200H)
- Glass Mount saddle available (part GS200GH)

TECHNICAL INFORMATION

- Voltage 12Vdc or 24Vdc (+/-10%)
- Current Draw: 420mA @ 12Vdc; 210mA @ 24Vdc
- Dimensions:
Lock= 180mm (L) x 30mm (W) x 27mm (D)
Armature plate= 180mm (L) x 30mm (W) x 33mm (D)
- Holding Force: Up to 545kg (1200 lbs) in shear
- Weight: 1.2 kg approx.

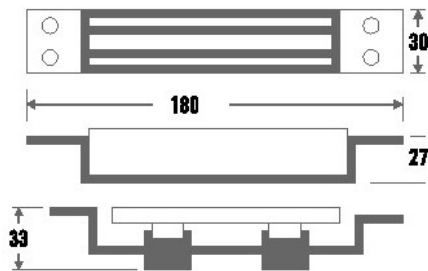

RELATED PRODUCTS

 <p>GS200GH</p>	 <p>GS200H</p>	 <p>GS200M</p>	 <p>SL183</p>
---	--	---	---