


## GS200M

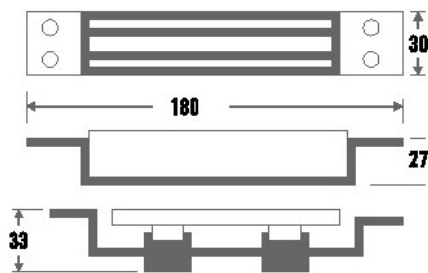

## MONITORED MICRO SHEARLOCK

This monitored micro shearlock is recommended for use on doors where a concealed lock is required. Ideal for double action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

### FEATURES

- Lock monitored
- Mortice fitting
- Aluminium
- Up to 540kg holding force
- Horizontal or vertical installation

### TECHNICAL INFORMATION

- Voltage 12Vdc or 24Vdc (+/-10%)
- Current Draw: 420mA @ 12Vdc; 210mA @ 24Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 24Vdc
- Dimensions:
  - Lock = 180mm (L) x 30mm (W) x 27mm (D)
  - Armature plate = 180mm (L) x 30mm (W) x 33mm (D)
- Holding Force: Up to 545kg (1200lbs) in shear
- Weight : 1.2 kg approx.

## RELATED PRODUCTS



**GS200**



**GS200GH**



**GS200H**



**SSP-VCKPK**