sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

GS200M




SSP MONITORED MICRO SHEARLOCK

SSP Monitored Micro Shearlock

FEATURES

- Lock monitored
- Mortice fitting
- Aluminium
- Up to 540kg holding force
- Horizontal or vertical installation

TECHNICAL INFORMATION

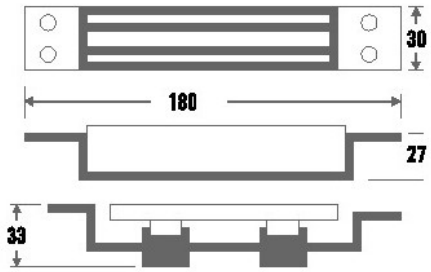

- Voltage 12Vdc or 24Vdc (+/-10%)
- Current Draw: 420mA @ 12Vdc; 210mA @ 24Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 24Vdc
- Dimensions:
  Lock = 180mm (L) x 30mm (W) x 27mm (D)
  Armature plate = 180mm (L) x 30mm (W) x 33mm (D)
- Holding Force: Up to 545kg (1200lbs) in shear
- Weight : 1.2 kg approx.

RELATED PRODUCTS



GS200



GS200GH



GS200H