
SPECIALIZED SECURITY PRODUCTS

sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

SB260



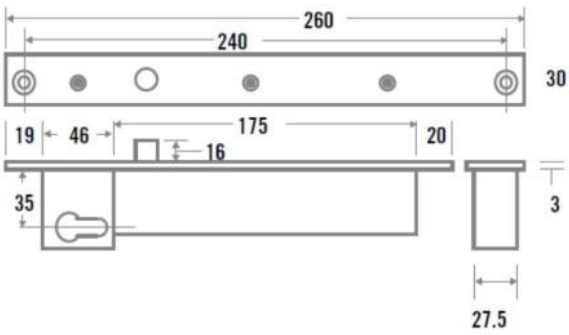

SSP 12/28VDC FAIL SECURE SOLENOID BOLT WITH KEY OVERRIDE

SSP 12/28VDC Fail Secure Solenoid Bolt With Key Override

FEATURES

- Mortice fitting
- 12-28Vdc
- Fail secure
- Bolt diameter 15mm
- Key override
- Cylinder/thumb turn not supplied
- Activating current 1Amp
- Holding current 300mAmp
- Optional keyed alike
- Stainless steel

TECHNICAL INFORMATION

- Fail-Security Version (Power to Open)
- Power Input: 12~28 V DC
- Voltage Tolerance: 10%
- Current Draw:
  Pull in: 1.0A, Holding: 0.3A@12V DC at temperature 20
- Operating Temperature: -10~+45
- Humidity: 0~95% non-condensing.
- Lock's surface Temperature (when the power is on):
  current temperature +20
- Tested to 500000 cycles
- Face Plate Material: stainless steel
- Autolock Time Delay : 3, 8 ,15 ,25 seconds
- Weight Approx. : 1.3 Kg

RELATED PRODUCTS



EB180



EB900W



SB262



SBCYL