sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

SL183




SSP 12VDC MONITORED MICRO SHEARLOCK WITH AUTO RE-LOCK

SSP 12VDC Monitored Micro Shearlock With Auto Re-Lock

FEATURES

- Auto relock with adjustable time delay 0.5-25 seconds
- Lock monitoring
- Door status monitoring
- Recommended for horizontal mount
- Mortice fitting
- Fail-safe

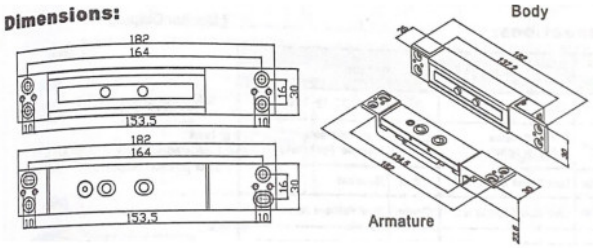

TECHNICAL INFORMATION

- Up to 1200kg (2600lb) holding force
- Voltage: 12-24Vdc
- Operation current:
  900mA@12Vdc
  900mA@24Vdc
- Holding current:
  220mA@12Vdc
  190Ma@24Vdc
- Magnetic distance (max)
  3mm @ 12Vdc
  5mm @ 24Vdc
- Monitoring relay: NO and NC contacts
- Rating: 24V/1A
- Fail-safe
- LED indicator included - Optional install

RELATED PRODUCTS



GS200M



SL183GH



SL183H



SL705-30