
SPECIALIZED SECURITY PRODUCTS

sales@specialized-security.co.uk
www.specialized-security.co.uk

01763 274 223

SL705-35



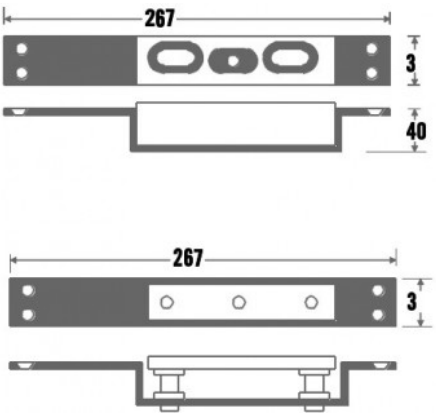

SSP 35MM SHEARLOCK MONITORED WITH ADJUSTABLE LOCKING PIN

SSP 35mm Wide Monitored Shearlock Adjustable Locking Pin

FEATURES

- Mortice fitting
- Suitable for double swing doors, or sliding doors
- Horizontal or vertical installation.
- Lock monitoring (magnetic bond sensor)
- Anti-residual magnetism design
- Locking time delay: 1-6 seconds (adjustable)

TECHNICAL INFORMATION

- Voltage 12-24Vdc (auto-selectable)
- Current Draw:
  Pull-in current: 1.9A @ 12 Vdc; 1.2A @ 24 Vdc
  Holding current: 550mA @ 12 Vdc; 350mA @ 24 Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 30 Vdc
- Holding Force: Up to 1000kg (2200 lbs) in shear
- Permissible gap between lock and armature plate = 3mm max.
- Weight : 2.2 kg approx.

RELATED PRODUCTS



GS200M



SL183



SL705-30