


ABLOY-352M.80

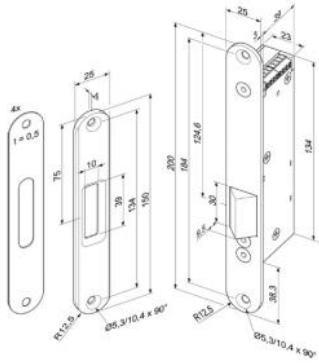

- DIN-direction: Universal 12-24Vdc
- Monitoring contact (RR): Yes
- Diode (05): Yes
- Fail-unlocked: Yes
- Armature monitoring contact: Yes
- Input operating voltage: 12-24 Vdc $\pm$ 15%
- Max. current consumption with motor operation (approx. 2 s) 12Vdc: 600 mA
- Max. current consumption with motor operation (approx. 2 s) 24Vdc: 290 mA
- Current consumption in continuous operation (locked) 12Vdc: 360 mA
- Current consumption in continuous operation (locked) 24Vdc: 190 mA
- Approvals: ETVTR|EN 13637
- Max. pre-load: 5000 N
- Break-in resistance: 5000 N
- Operating temperature range: -15°C to +50°C
- Installation position: Vertical and horizontal
- Length: 200mm
- Width: 25mm
- Depth 42mm
- Material bolt: Steel
- Rebate clearance: 3mm (2mm – 4,5mm)