

EM40-ARM/SAFETY




DOUBLE STANDARD MAGLOCK SURFACE MON 12/24VDC WITH ARM STRAP

Standard monitored double magnetic lock designed for indoor applications where 545kg holding force is required. Monitoring provides LED lock status indication and relay contacts for signalling.

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring

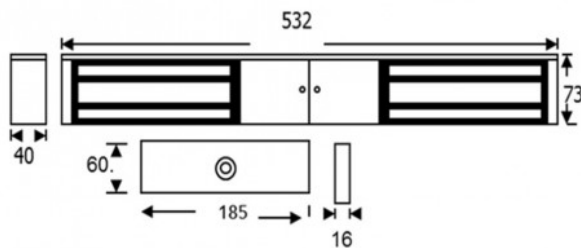

TECHNICAL INFORMATION

- Holding force: up to 545kg (1200lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 9.6kg approx.
- Relay: COM/NO/NC (1A@ 24Vdc) (one per side)

RELATED PRODUCTS



EM40DS



EM500CL



EM520S



NT200