

## GS200



### UNMONITORED MICRO SHEARLOCK


This unmonitored micro shearlock is recommended for use on doors where a concealed lock is required. Ideal for double action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

#### FEATURES

- Mortice fitting
- Horizontal or vertical installation
- Surface housing available (part GS200H)
- Glass Mount saddle available (part GS200GH)

#### TECHNICAL INFORMATION

- Voltage 12Vdc or 24Vdc (+/-10%)
- Current Draw: 420mA @ 12Vdc; 210mA @ 24Vdc
- Dimensions:  
Lock= 180mm (L) x 30mm (W) x 27mm (D)  
Armature plate= 180mm (L) x 30mm (W) x 33mm (D)
- Holding Force: Up to 545kg (1200 lbs) in shear
- Weight: 1.2 kg approx.

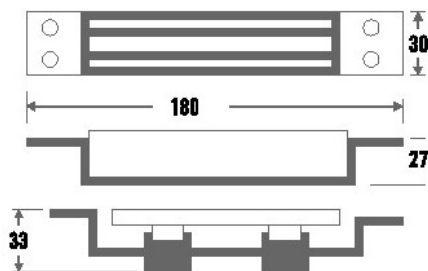

## RELATED PRODUCTS

 <p><b>GS200GH</b></p>	 <p><b>GS200H</b></p>	 <p><b>GS200M</b></p>	 <p><b>SL183</b></p>
---	--	---	---