




Be ahead

MAXIMA ULTRA 36

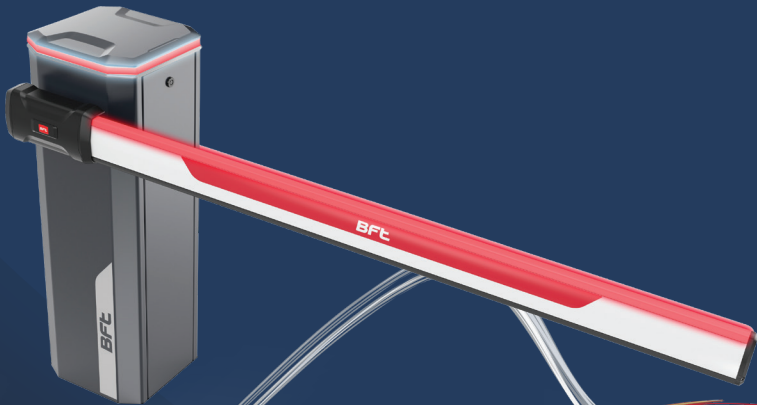



www.bftautomationuk.com



MAXIMA ULTRA 36



Robust electromechanical barriers for intensive use

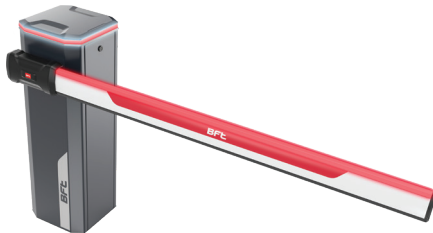

| | MAXIMA ULTRA 36 |
|------------------------------------|---|
| Useful passage | from 2 to 6 m |
| Control unit | CSB Xtreme |
| Motor type | asynchronous three-phase |
| Gear unit type | in oil bath |
| Motor power supply | 230 V |
| MCBF (Mean cycles between failure) | 7,000,000 movements |
| Slowdown | soft opening and closing |
| Impact reaction | encoder |
| Locking | mechanical |
| Release | inside the structure |
| Frequency of use | 20,000 (@3 m), 5,000 (@6 m) movements per day |
| Environmental conditions | from -40 °C to 60 °C |
| Protection rating | IP55 |



North branch - 0161 456 0456
South branch - 01488 674 750

info@bft.co.uk
www.bftautomationuk.com